

May - June 2005


RECREATIONAL FLYER

Recreational Aircraft Association Canada www.raa.ca
The Voice of Canadian Amateur Aircraft Builders \$6.95

STOL for the People:
Zenith's Amazing

CH 701

C-1GSO

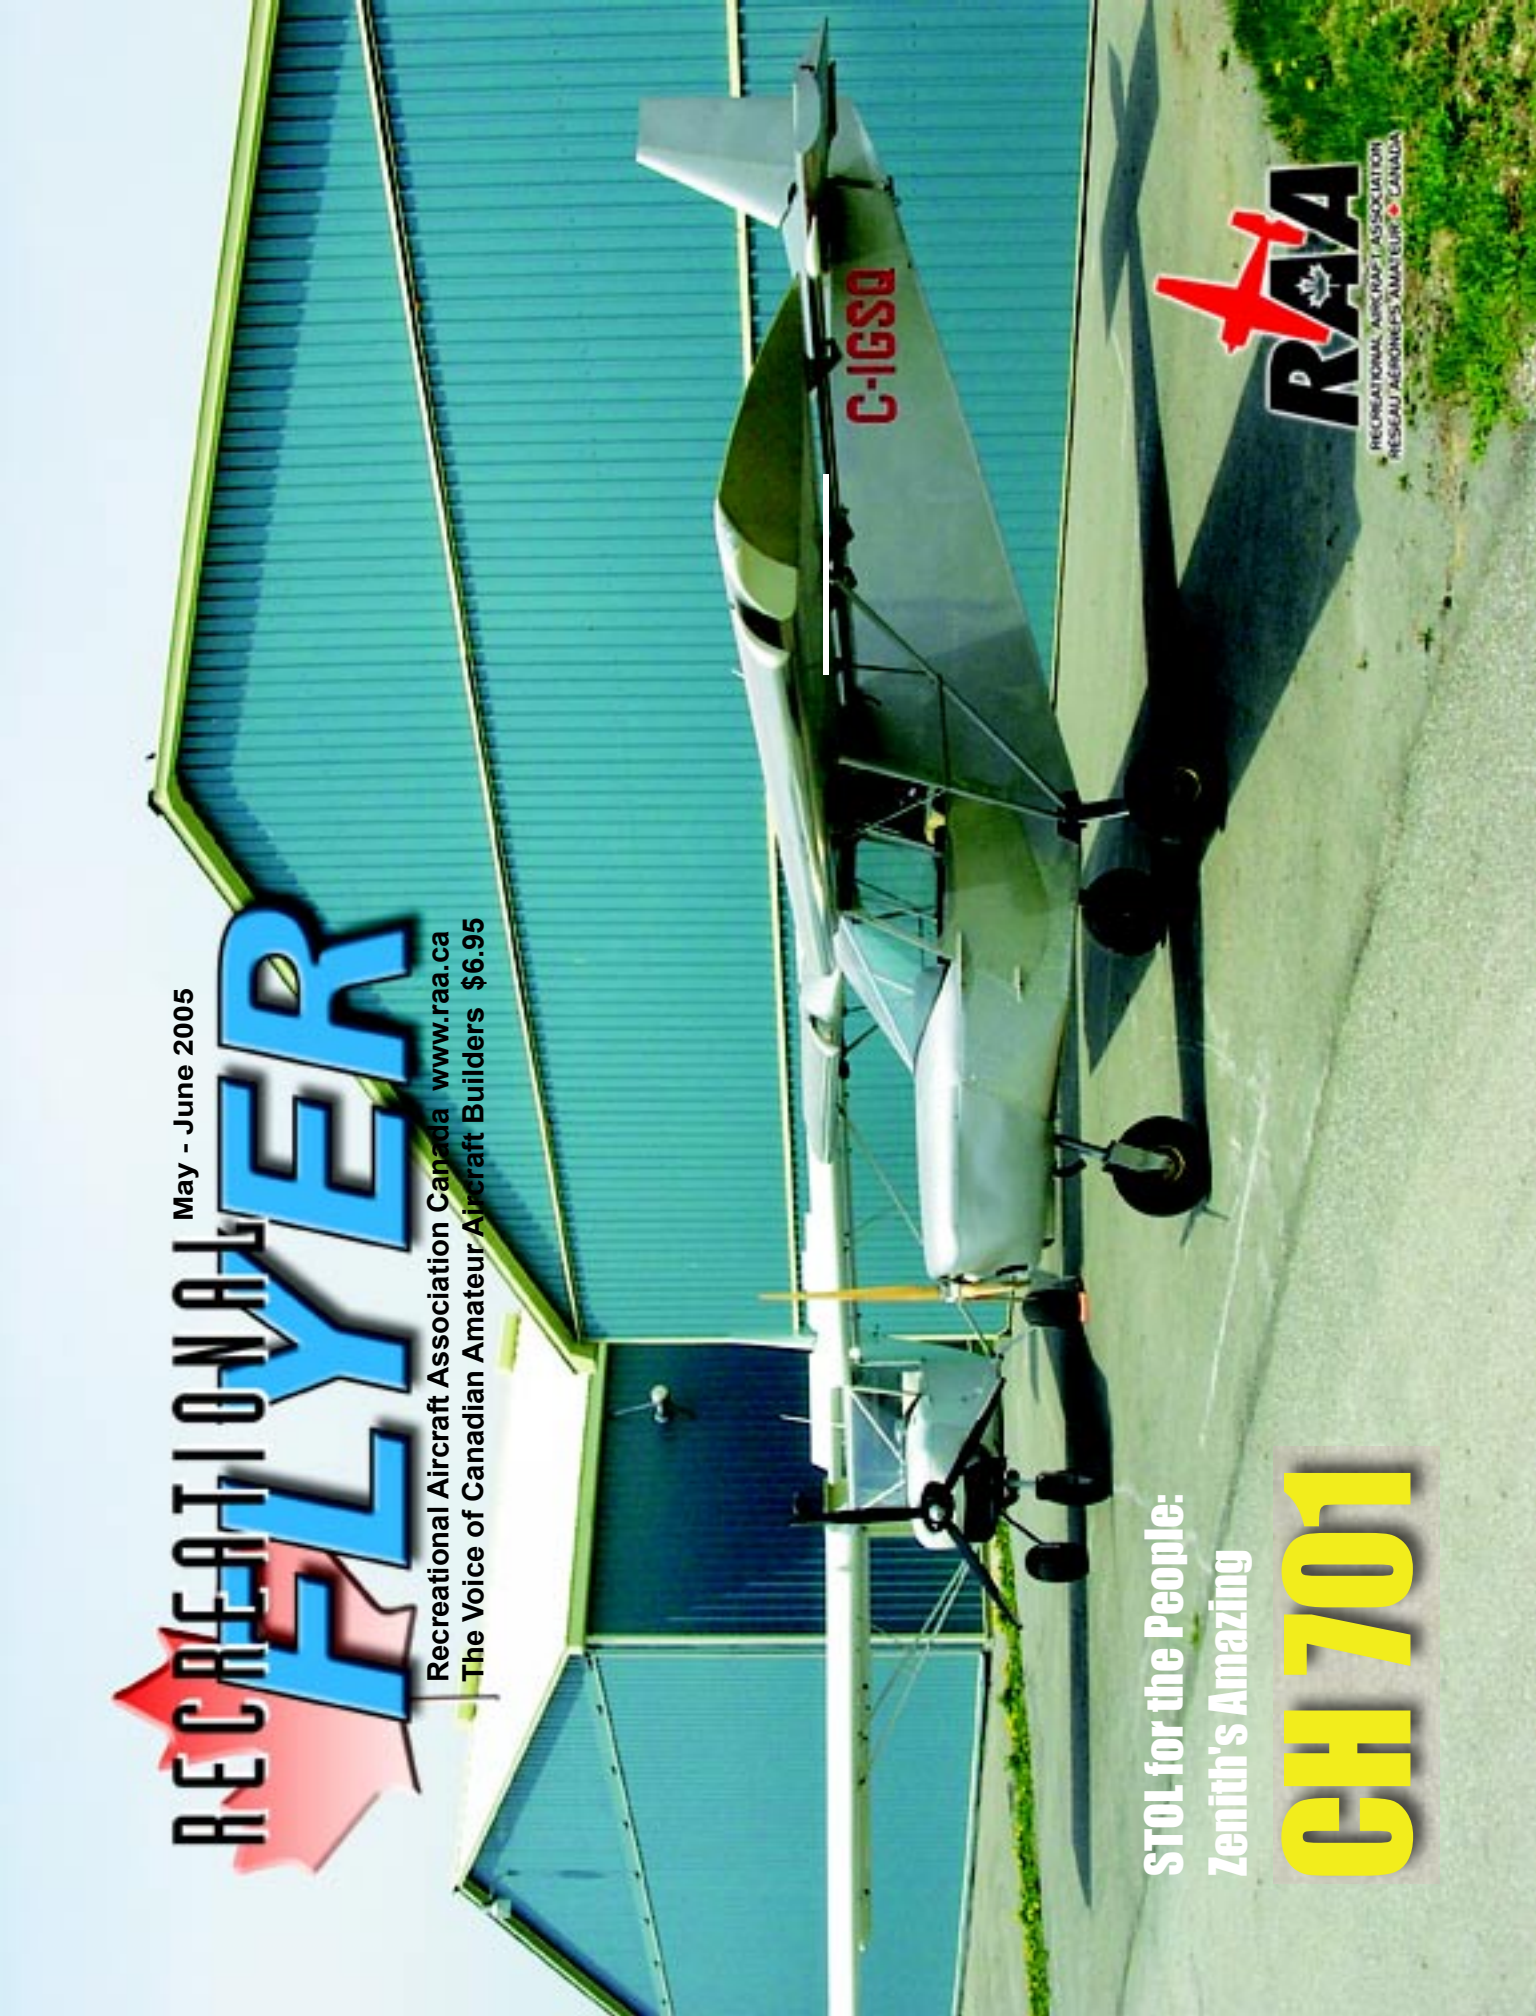



from the president's desk

Gary Wolf

2005 AGM in GODERICH

The August 24-28 Aviation event in Goderich Ontario will celebrate the first flight of Keith Hopkinson's Stitts Playboy in 1955, and the beginning of a new era in amateur-built aviation. RAA Canada will have a display hangar with a weight and balance as the centrepiece, surrounded by demos and displays of various aircraft building skills. The RAA AGM will be held in the early afternoon of Saturday August 27. This will be an excellent fly-in with pilots from all across the country in attendance. The website for this event is www.50thhomebuilt.com.

RAA NOMINATION FORM

This issue includes a form to get yourself nominated to run for a position on the Board of RAA Canada. Have the form signed by five RAA members and send it in to Bill Rice. There are two positions coming open, and we could use your input and help. Send it now.

MAY 10 TRANSPORT-INDUSTRY MEETING IN OTTAWA

The main purpose of this meeting was for LAMAC to present to Transport Canada their proposal for a new category of aircraft in Canada, fully-manufactured aircraft up to 4000 pounds with an Industry-monitored standard of design and construction. Light Sport aircraft would fit into this category. To ensure safety, LAMAC is proposing to set up an arms-length verification group which would verify that each plane met its design standard all through construction, and was test-flown before release to the customer. This proposal has now been given to Transport for critique and tweaking prior to beginning the long process to acceptance at CARAC. www.lamac.ca

will get you to the wording of the proposal. Please read it and send your responses to wolfpack@sentex.net. RAA Canada will collect these and present them to LAMAC.

RAA Canada has been lobbying RecAv for changes in the way that AULA aircraft are handled by Transport Canada, and this bore some fruit at this meeting. One of the most contentious aspects of AULA is that Transport has been maintaining an 'Approved List' of advanced ultra-

lights. The word 'Approved' would imply that all planes on the list do in fact meet the DS 10141 standard, when in fact some do not and are technically illegal. Transport has agreed to change the wording of this document. Shortly they will give a caution that this category is a contract between the seller and the buyer, and it is up to the buyer to verify that any given aircraft is legally allowed to be registered AULA. RAA Canada has suggested the word "Eligible" as a replacement, with a disclaimer to warn the buyer.

Transport Canada has also agreed to give more information to allow the buyer of an AULA to make an informed decision. They will be changing the AULA listings to include the engine, empty weight, gross weight, and landing gear type for each aircraft listed. For example the Whizzo 912 on Drippo amphib floats would be listed with a manufacturer's empty weight of 650 pounds, and a gross of 1100. The same plane with a 503 on wheels might be listed at an empty weight of 450 and a gross of 1100. All stated weights would still be unverified, but this is still a good step forward. This will also assist the Registration department because they will readily know what the maximum gross weight can be for a particular model. At present there are some AULA's registered at well above their manufacturers' allowable gross weight.

EARLY SEASON PREPARATION

This time of year usually sees us pulling out the planes that have been sitting idle all winter. One frequent Spring-time occurrence is an engine-out from using old fuel that has become contaminated with condensation. Auto gas is susceptible to growth of algae these days, so if your fuel sample has a grey cast or even worse, little black dots, you should drain, clean, and refill the tank. Even Avgas can suffer from condensation or melted snow if the plane has been stored outside or in an open-faced hangar. While you are at it, have a look for mouse and birds nests in the wings, down the tailcone, and especially inside the engine cowling. Last year I saw a Katana taxiing with smoke coming out of the cowling. The Rotax canister-type exhaust muffler makes a nice platform for a winter nest.

See you at the Fly-ins!

The Recreational Aircraft Association Canada

13691 MCLAUGHLIN ROAD, R R 1,
CHELTENHAM, ON L0P 1C0

Telephone: 905-838-1357

Fax: 905-838-1359

Member's Toll Free line: 1-800-387-1028

email: raac@inforamp.net

www.raa.ca

The Recreational Flyer is published bi-monthly by the Recreational Aircraft Association Publishing Company, Brampton Airport, Cheltenham, ON L0P 1C0. The Recreational Flyer is devoted to the aerospace sciences. The intention

of the magazine is to promote education and safety through its members to the general public. Opinions expressed in articles and letters do not necessarily reflect those of the Recreational Aircraft Association Canada. Accuracy of the material presented is solely the responsibility of the author or contributor.

Features

The Specialist

Gary Wolf takes an up-close look at Zenith's Flying Jeep 4

Skycycle

An inexpensive, versatile way to commit aviation 14

The Challenger Weighs In At...

Tech stuff on Quad City's venerable design 16

Bill and Gord's Excellent Sun 'n Fun Adventure

Brothers Bill and Gord Reed check out the First Big Airshow of the season 22

Canadian Aviation Expo '05

It's coming! Jim Marsh looks at what's in store 24

Basic Metal Shaping

It's easier than you think. By Gary Wolf 27

From the President's Desk

by Gary Wolf 2

Across Canada: Chapters in Action

by Don Dutton 11

Flying News 21

Tech Stuff

Rotax Intake Silencer Caution / by Gary Wolf 31

Classified 38



The Specialist:

Gary Wolf tries on the Zenith CH 701

Text and Photos by Gary Wolf and Mary Mills



No one looking at a Zenith 701 sitting on the tarmac has ever accused this plane of being excessively beautiful. However in flight, the charm of this STOL aircraft becomes immediately apparent. Chris Heintz designed the CH701 some twenty years ago and it has proven itself all around the world. When the only runway is a cleared patch in the jungle, and the alternative is a week of hiking through snake-infected swamps, the 701 starts to look pretty good. This is a plane that can use almost any clearing as a runway, and its high angle of climb means that you won't hit the trees at the end of the strip. A football field is plenty enough air-strip for a 701. With performance like this, the boxiness of the fuselage can be forgiven.

When Chris Heintz drew the 701 it was a complete departure from his earlier designs. He had earlier designed for Avions Robin, and the influence of those wooden French aircraft can be seen in his earlier 200 and 300 series of low-winged aircraft. Chris pioneered the use of 6061 aluminum and Avex pulled rivets for aircraft, and the 701 continues this successful combination. The original 701 was designed around the Rotax 532/582 2 stroke engines, and in this configuration could be built light enough to qualify for the

then-new AULA category. The original gross weight of the plane was 960 pounds, and lately there have been spar and other detail mods to increase the gross to 1100 pounds. A light air-frame weight is achieved by careful selection of materials, and to that end most of this plane is made from .016" aluminum sheet. Artful and subtle design create a strong and light structure that can take a beating, even when loaded up with a 100 hp 912S and a set of amphib floats.

The leading edge slats are the secret of the STOL characteristics of the Zenith 701, and they drive the entire design. Because of these, the wing can be much smaller than that of a conventional STOL, which relies on large area and low wing loading to achieve a slow takeoff and landing speed. Unfortunately, low wing loading also means a plane that is sensitive to turbulence. Many conventional ultralights can match the takeoff and landing of the 701, but

these usually fly only in the morning and evening when the air is calm. The Zenith 701 has a short span wing with a very high coefficient of lift and a higher wing loading, so it is not unusual to see one flying in 25 knot winds, in the mechanical turbulence that usually accompanies that sort of weather. The slats and full length flaperons result in a coefficient of lift of as high as 3.3, and this means a short wingspan of 27 ft for efficient hanging, and nimbleness in the air. The short wing is also much stiffer and lighter,

Artful and subtle design create a strong and light structure that can take a beating, even when loaded up with a 100 hp 912S and a set of amphib floats.

increasing the payload of the 701. The Junkers flaperons are used to provide excellent control right down to stall. There is no washout in the wing itself – all washout is by the difference in the angle of attack of the inner and outer flaperons.

The slats develop their amazing lift at a high angle of attack, and this requires a fuselage tailcone with a steep rise, to keep the tail from banging the ground on takeoff. The horizontal stabilizer has an inverted airfoil to provide maximum downforce with minimum drag, and it is mounted on top of the fuselage for ground clearance. The bottom of the all-flying rudder is cut at an angle too, again for ground clearance during high angle takeoffs.

The wing of the 701 is all aluminum, with a built-up main spar from $\frac{3}{4}$ " aluminum angle .090" thick and a shear web from .025" with stiffening holes down its length. At the outer end where the loads are light, the spar becomes a .025" channel, bevelled on its bottom surface for the Hoerner wingtip. The forward spar is stressed to the usual Zenith standard of +6, -3 ultimate. Chris began his career by doing stress analysis for the Concorde, so his numbers are credible. The spar is hard-riveted, and everything else on the plane uses Avex pulled rivets. The D-cell has four slots along its length for the standoffs that support the slats from the nose ribs. The rear spar for the 701 is a series of short aluminum sheet channel sections, fitted between the rear ribs. The wing skins continue past the rear spar and

are squeeze riveted together right at the trailing edge. The result is a rigid and light torque box. Lift struts are usually round steel tubes, but airfoil section aluminum lift struts are used by some. Round steel tubes are very draggy, so some builders have made .016 aluminum streamline fairings from material left over from building the rest of the plane. Members Jay Davis and Gerry Poulton have both done this and have reported an increase of 5 mph, very worthwhile for an afternoon of work.

The slats have even determined the type of landing gear on this plane. A tricycle gear can be rotated to a higher angle of attack, so this was chosen for the 701. Because this plane can get in and out of anywhere, the landing gear must be strong and compliant to handle the rough ground that the plane will encounter. Early models had a flat spring aluminum main gear with $\frac{3}{16}$ " aluminum forks. These forks were later reinforced by top doublers to give better lateral stiffness. The latest gear, completely retrofittable, is the four-bend aluminum "jeep" gear, which is usually fitted with wide flotation tires. The earliest 701's used plastic nosewheels and aluminum spiderweb Azusa main wheels, some with drums and some with discs. The latest planes use wide Matco wheels mounted on cantilevered axles bolted to the sides of the jeep spring. The Matco and jeep gear combination is the preferred combination, but check the inside flanges for cracks after a hard landing.

The steerable nose gear is a simple tubular plunger suspended on bungee. There is an aluminum fork bolted to the bottom of this plunger, and the latest model's fork has been widened for tundra tires, and now carries a top doubler. Mid-series models used the same spiderweb aluminum wheels as on the main gear. Whether the tundra tire is necessary for the nose depends on where and how the plane is landed. Some owners use a \$19.95 wheelbarrow wheel and tire on the nose, and even it seems to work well enough for normal use.

The fuselage of the 701 is constructed primarily of 6010T6 aluminum sheet that is .016" thick. A 4 x 12 sheet weighs under 12 pounds. The tailcone of the 701 is made from four flat panels that are reinforced with .025" aluminum $\frac{3}{4}$ " angle stock, to minimize oilcanning. The four flat sides are connected by .040" aluminum angle stock, riveted with corner gussets. Two bulkheads at the rear give torsional stiffness to resist rudder loads, and the rearmost car-

At high angles of attack the slats funnel high speed air over the top of the wing, and keep the flow attached





Right: Nose gear is suspended by bungee
Below, Left to Right:

- 1. Rigged at 8 degrees, Gerry Poulton's 80 hp 701 gets off the water within a few hundred feet**
- 2. Heintz's trademark all-flying rudder, and inverted airfoil stabilizer**
- 3. late style main gear with tundra tire**
- 4. early main gear with Azusa wheel**

ries the rudder hinges. Even with the .025 angle stiffeners, the sides of the tail cone will rattle like distant thunder if the engine is a 912 that is reluctant to start. Some builders have lagged the insides with foam, but this adds weight. Others have used their fluting pliers to crimp the .025 stiffeners, bowing them out slightly to dampen the resonance. Once the 912 engine is up to its 2200 rpm idle speed, none of this matters because there is no more sympathetic vibration.

The forward section of the fuselage uses aluminum sheet in thicknesses up to .040, depending on the particular part. There is a .040 channel under the seat to accept the flat spring landing gear, and it is tied into the forward seat bulkhead that carries the centre stick controls. Seats are married into the fuselage sides to give lateral stiffness to the structure. The forward fuselage sides are stiffened by a series of .025"

angles, and by 4130 tubes that descend from the forward wing carry-through. The doorframes are the cabanes for the wings, and the rear one is supported by the monocoque seats and the package shelf. There is a bulkhead at the cabin rear, at the vertical station where the tail cone attaches. Every part does double duty in this design, another reason for the lightness of this plane. The forward wing carrythrough is welded from 4130 tube and has "seaplane braces" that mate to the upper motor mount bracket, sandwiching the steel firewall and providing a straight load path to the engine. Doors are usually made from .016 sheet with framing from 3/8" aluminum tube, and .040 lexan for windows. Some builders make slider windows, others make them completely removable for summer flying. Some even leave the doors back in the hangar on nice summer days. Zenith now sells clear

lexan bubble doors that increase the elbow room from 40" to 44". Some builders have added lexan windows behind the doors to improve rearward visibility. The drawings show clear lexan for the cabin top, and this provides good sightlines in the circuit. The forward fuselage section and the tailcone are built as separate subassemblies, so the standard 4 x 12 building table will suffice for construction. Before building a table your own, check with your chapter or on the RAA National e-mail forum to see who has one sitting in his garage. Members will frequently loan a table or even give it away.

The vertical tail of the 701 is unusual. The rudder is all-flying, hinged near the bottom from the rear bulkhead. The tapered spar is .025 aluminum reinforced at the flanges with .040 angles. The nose is a D-cell with only top and bottom ribs. There is a



series of ribs to support the flat sides of the rear .016 skin. Zenith sponsors rudder workshops several times a year, and many who attend never go any further. If you are plans building, rudders are a dime a dozen. Watch out though for skewed ones though. This part must be built carefully to end up with a straight part. The rudder hinges are made from 1/8" wall, 3/4" aluminum angle, and the pivot points are bushed with short 1/4" steel tubes. The load on these hinge points is high, and cleanliness and lubrication is essential to prevent wear. Member Tom Mills recommends Castrol motorcycle chain lube, because its vehicle evaporates to leave a clear lubricant in the pivot. Tom uses this at all pivots for the control surfaces, and also for the nose gear plunger.

The horizontal tail has an inverted airfoil to minimize drag while providing the downforce to achieve a maximum climb angle. The stab has two channel spars, and the elevator has one. Hinge points are at the ends and also at the centre, and the cable-operated horn is tucked under the nose of the rudder. The stab is mounted to the fuselage upper longons by aluminum angles and doubler plates, to carry the loads to the fuselage side skins.

Flying It

OK- what does it fly like? Here is a typical circuit with two 200 pound pilots and a full 40 litre cowl tank. We used Tom Mills' plane, fitted with an 80 hp Rotax and an Ivo 72" three blade Patriot prop. Give the 912 full throttle and pull back slightly on the centre stick. Within a hundred feet the airspeed is 40 mph and the wheels pop free of the ground. Immediately pull back to hold 60 mph for climb. This results in a surprisingly high angle, and anyone accustomed to a Cessna will want to climb at 70 mph, or pull back a bit on the throttle until he becomes accustomed to the angle.



Because of the high climb angle, the forward speed will be something like 45 mph at this stage. Circuit height can be reached before the end of a 4000 ft runway with only a 5 mph headwind. Pull back to 5000 rpms, turn crosswind, then downwind and check the gauges. The 80 hp 701 will be clipping along at 75 mph at this power setting and weight. Tom's test plane is used for ultralight training so its prop setting is biased towards climb. With this setting this plane will hit 85 mph fully loaded at 5600 rpms. It will actually go faster but the throttle must be pulled back to prevent over-speeding of the engine. A slightly coarser setting would probably better suit most pilots, and provide another 5 mph. Hold circuit altitude until the base to final turn, one-half mile out from the numbers and pull back to idle. Lift the nose to maintain 55 mph in descent and hit the numbers, feeding in a bit of power to slow the slow the rate of descent during flare. The landing will take fewer than 200 ft, and this is without the flaperons. There is none of that Cessna



BCI Aero Coatings

Serving Halton Region for 25 years.

Top Quality Fabric Dopes at Reasonable Prices. Clear, Silver, and Coloured Butyrate dopes, Nitrate Dopes, Butrate Rejuvenator, Retarders, Reducers and also MEK.

Behl Chemicals Inc.

Milton, Ont (905)878-1783 toll free 1-800-670-5656

Email: info@behlchemicals.com

www.behlchemicals.com



Ultralight instructor
Tom Mills in his
plansbuilt 701

This is a plane for flying a couple of hours to a fly-in, for landing on a riverbank to fish, or on a farm driveway to visit friends

glide in a 701, nor is there much chance of ballooning. If there is any fault with the plane it is that the pilot must fly it right to the ground, and then flare. With the nose high, the flying stops at just under 40 mph. Flare ten feet high and the landing will be a hard one.

Pilots report that the power-off stall is a gentle mush with an automatic recovery, almost a non-event. Power-on stalls require a determined pull on the stick, and if top rudder is applied to correct a wing drop, it might just be possible to enter a spin. It would

take a determined effort to get enter a spin, and most have never been able to approach it.

Seventy-five mph for cruise uses less than 15 litres of 87 octane auto fuel per hour, so the 40 litre cowl tank provides almost 200 miles of useful travel with a half hour reserve. Wing tanks hold 40 litres each, and more than triple the range of operation. Seventy-five mph might not be impressive to some but it compares well to a J-3 Cub. When the 701 is fitted with the 100hp 912S engine and a Woodcomp prop it becomes a much livelier plane. Tom Mills recently test flew a newly-completed 701 at Brampton and it would actually hit the Vne of 110 mph, verified by his GPS. The cruise on this plane is 100 mph, and Tom gives much of the credit to the Woodcomp. This is a plane for flying a couple of hours to a fly-in, for landing on a riverbank to fish, or on a farm driveway to visit friends, in short for any sort of sport flying that doesn't involve long cross country distances. Even with the plane's moderate speed, Jay Davis and David Chesterman have flown their 701's from London Ontario to Oshkosh, by the Northern Michigan route.

Don and Beate Kingsley used their original 80 hp amphib 701 as the grocery-getter when they lived on an island. When they moved back to the mainland, they sold it to get a bigger plane so that their dog Jack could accompany them on trips. Don is now building another amphib 701 because he misses the fun of the 701. Gerry Poulton fitted his 912-powered 701 with a set of Puddlejumper amphib

COPA **IS personal aviation**

Join now and support aviation in Canada today!



Canadian Owners and Pilots Association
207 - 75 Albert Street, Ottawa, ON, K1P 5E7
Tel.: 613-236-4901, Fax: 613-236-8646
E-mail: copa@copanational.org
Web site: www.copanational.org

Rigged at 8 degrees, Gerry Poulton's 80 hp 701 gets off the water within a few hundred feet



floats and loves it. At first he had the floats rigged at a 4 degree angle to the wing and found that the tails of the floats were dragging when he tried to rotate. He had to attain an excessive speed to gain enough lift for takeoff. Rerigged at 8 degrees, the plane pops off at 40 mph because the wing is at a high enough angle of attack to develop good lift. The downside is that there is more drag from the floats while in flight, but the tradeoff is worth it. Zenith recommends as high as 12 degrees for some applications. Amateur-built and U/L registered 701's may be fitted with any floats that the owner prefers. Planes registered AULA must use Zenith floats only, because Zenith's DS10141 statement to Transport states that the combination has been tested and will meet the requirements of the category.

Many builders, especially those building from scratch, frequently want to fit engines other than

the 912 series Rotax. Here are some cautions: do not fit any direct drive VW conversions that use a prop in the 52-60" range or the low prop efficiency will kill the STOL performance of this plane. Even 2 strokes with 64" three blade props will not deliver the goods. Choose an engine that will develop 80 hp and can turn a 68-72" prop, while weighing less than 200 pounds. This rules out Subarus too because they generally come in at 230 or more pounds, and will require a lot of tail ballast to balance. Tom Mills tried a 200 pound Geo Metro 1300 and used it for three years of flight training, but it felt like about 70 hp. Right now the only engine that will make the 701 perform is the Rotax 912 or 912S. Fortunately there are a lot of 80 hp half time engines, and even some rebuilds on the market. When Rotax came out with the 912S, owners of all types of planes began selling their 80 hp engines. It is still not a buyer's market

Anyone interested in a 701 should spend an evening reading the Zenith design college section on the factory site, and cruise the links for building tips

but the prices are low enough to compete with a converted auto engine and redrive. Gerry Poulton's 701 was originally powered by a so-so Subaru EA81 and it was a disappointment. For \$10,000 CDN he bought a zero timed 912 from Tri-City Aero and has been flying happily ever since. On the used market, a 701 with any 912 is usually offered for \$30-45000, depending on whether it includes floats or skis. 912 701's get sold quickly. Any other engine attracts only the tire kickers.

There are a lot of copies of the 701 being built all over the world, and they all claim to have made improvements. Some have rounder fuselages, some have conventional wings and tail, some have longer wingspan, and all claim to be better than the 701. The www.zenithair.com website even devotes space to these imitators.

Anyone interested in a 701 should spend an evening reading the Zenith design college section on the factory site, and cruise the links for building tips. Member Mark Townsend has his own website, www.701.com devoted to this plane. There is so much information available on the 701 that no one has to worry about getting stymied during construction. The plans are well drawn, and a builder can choose any route from complete scratch built to a full kit. All sub-kits are available separately, and the newsgroups can often lead a builder to a partially completed project at a bargain price.

With the new Light Sport category arriving in the US, Chris Heintz is now building the prototype of a larger version, called the CH 750. The plane will have two feet more

wingspan with the same chord and airfoil. The fuselage will be a couple feet longer with larger tail area, still using the inverted airfoil for the stab. The landing gear will be stronger to handle the higher gross weight, and the fuselage will be widened a couple of inches and will use the CH601 firewall and nose gear. This plane will use two different 100 hp engines, the 912S, and the O-200. Chris Heintz feels that the new US Sport Pilot license will attract the older crowd who are afraid of losing their medicals. These pilots will feel more comfortable with a Continental, so Chris has convinced Continental to go back into production with the O-200. This CH 750 will be an excellent STOL aircraft.

From fifty feet away the new CH 750 will look just as beautiful as the current CH 701. **RAA**

Keep in Touch With Your Board of Directors!

Board of Directors Email Addresses

Gary Wolf President
 519-648-3030 wolfpack@sentex.net
 David Moore Vice President (programs)
 charlotte.moore@sympatico.ca 905-659-3454
 Chris Gardiner Secretary
 905-668-5703 cgardn628@rogers.com
 Bill Weir Acting Treasurer
 519-461-0593 billweir@lon.imag.net
 Frank Nordhuis Webmaster

RAA Regional Directors

Vancouver Island:

Ken Armstrong 250-652-3528
 aviator-horizon@telus.net
 709-6880-Wallace Dr., Brentwood Bay, BC V8M-1N8

Mainland BC:

Rob Prior 604-422-8446 airframe@telus.net
 3032 Carina Place, Burnaby, BC V3J-1B5

Alberta North:

Ralph Knight 780-456-1650 rdknight@telusplanet.net

Alberta South:

Gerry Theroux 403-271-2410 grtheroux@shaw.ca

Saskatchewan:

Curt Halpenny 306-934-2965
 cth.saskatoon@sasktel.net

Manitoba:

Jill Oakes 204-261-1007 jill_oakes@umanitoba.ca

Ontario SW:

Denny Knott 519-471-7058
 36 Guildwood Walk, London ON N6H-3X2

Ontario S/Central:

..... Gunnar Doerwald

..... 905-468-3713 gunnar@doerwald.net

Ontario East:

..... TBA

Ontario North:

Morris Frandsen 705-732-2789 frandsen@vianet.on.ca
 RR#1, Rosseau, ON P0C-1J0

Quebec:

Raymond Fiset 418-871-3761 rayfiset@qc.aira.com
 7925 Hamel Blvd., Ste Foy, PQ G2G-1C8

Maritimes:

Warren Ervine 902-865-2932 ervine@istar.ca
 50 Johnson Cresc., Lower Sackville, NS B4C-3A4

Appointed Positions:

Translation: Pending
 Magazine Mailing: Dave Evans
 Ultralights: Wanted
 Web Page Frank Noordhuis
 Insurance Committee Gary Wolf
 AirWear Bill Tee

Across Canada: RAA Chapters in Action

Don Dutton



WINNIPEG CHAPTER

The completion of the chapter hangar at Lyncrest Airport, officially known as the RAA Workshop and Final Assembly Building, has added some "magic" to the activities of this chapter, says the chapter newsletter, The Winnsock. It was built 2 ½ years ago at a cost of \$30,000 plus thousands of hours of volunteer labor and donated material. Also assisting in the financing were nine members who provided loans which were paid off in the first year of operation. Rental fees have covered all of the building's operating cost, including heating and hydro. Their ambitious schedule of events for the hangar this year started out with a three evening course (one a week) by Tom Stoyka on aircraft electrical systems. This was expanded to 1 ½ months due to popular demand. Stoyka followed that with a TIG welding workshop, then came Murray Leonard's Oxy-Acetylene course. Meanwhile Harry Hill is taking a weather course at the University of Manitoba with meteorologists from Environment Canada as guest lecturers.

The hangar, built primarily to "educate and aid aircraft builders and provide economical hangar space for final assemblies," has space for up

to four full size aircraft, a couple of smaller projects plus room for the RAA workshops and meetings. It started out with a Searay, an RV6A and an RV6, in for completions, and since then several other finished aircraft have rolled out its door. In addition members have brought in their aircraft for C of A's, to switch from wheels to skis and back again, and complete repairs. To keep all this running smoothly, the building has had three volunteer managers serving one year terms, starting with Daryl Lynds, then Curt Reimer and for 2005 Jill Oakes. Building maintenance has been handled by Gill Bourrier, Tom Stoyka, Daryl Lynds,; Curt Reimer and Jim Oke, Renters mow the grass and look after snow removal. Numerous members have donated supplies and equipment including comfortable chairs and work benches. The result is that this is one of RAA's most active and successful chapters – and the members are not stopping there. They are now planning fund raising activities – the target \$16,000 – to develop specialty spaces for painting, welding and presentations. That is the kind of magic many chapters wish for but it comes only with dedication and hard work.

MONTREAL (LONGUEUIL) CHAPTER

Two chapter members, Andre Gauthier and Claude Guilbeault, both pioneers in amateur built aviation in this area, have been inducted into the Hall of Fame of the Federation de Pilotage Sportif du Quebec/Recreational Aircraft Association, Montreal (Longueuil). The Hall of Fames was created to acknowledge the contribution of people who have made significant impact on the development of amateur built aircraft in aeronautics and aerospace in the province, the chapter newsletter noted.

Gauthier was No. 3 on the chapter membership list and Guilbeault was No. 4.

RAA OSHAWA DISTRICT

The first time they scheduled a session on flying on skis at a chapter meeting it snowed so hard that few could make it to the meeting. By the time it could be rescheduled the weather had turned so warm that most of the snow in the area had disappeared and even the ice on some lakes to the north of Oshawa was unsafe. However that should not discourage those thinking of outfitting their planes with skis as they will have all summer to build or buy skis and be ready for next winter said an ever optimistic Jim Griffin. While the meeting was promoted as a discussion on flying off snow and ice, led by Griffin, Hugh Gibson and Rick Trotter who base their planes on Lake Scugog, north of Oshawa, and Wayne Jeffery who flies out of Oshawa Airport on wheel-skis, it soon turned to a discussion on safety and the serious need to be equipped for winter survival. This is particularly important

Contributions to our Chapter Activities section are encouraged. Keep your fellow members updated on what is happening across Canada! Send your reports and newsletters to :

Recreational Aircraft Association

Brampton Airport, RR#1, Cheltenham, ON L0P 1C0

Telephone: 905-838-1357 Fax: 905-838-1359

Member's Toll Free line: 1-800-387-1028

email: raac@inforamp.net